

ZD20

Zigzag Cording Device



Differentiate your business
with Different attachment.



SUNSTAR CO., LTD.

Head office #178-67, GAJWA-DONG, SEO-GU, INCHEON, KOREA

tel +82[0]32-580-5980-93 fax +82[0]32-579-8350-51 www.swfkorea.com



For W24H service
www.swf-service.com



Main Features

- Various types of thread usable
- Much less stitches than generic cording
- Higher productivity : **800-1,000 RPM**
- Automatic lifting system on whole heads
- Manual lifting system on each head
- Much higher embroidery quality : **good touch feeling**
- Good stability and reliability







Specifications	
Max. Speed	1,000 rpm (DM Series)
Motor	Pulse motor X 1
Cord Diameter Size	2.5mm or less (TA-Series are suitable for cord with more than 2.5mm diameter.)
Applicable Thread	Uneven cord with 2.5mm or less
Applicable Models	DM, SB, CE, CA, TA, E, K Series (Unable to be attached to old model's Electronic Parts)

We can make some modification for improvements without previous notice.

Specification Comparison

	ZIGZAG CORDING DEVICE	CORDING DEVICE
Method	Stitching both sides of thread	Stitching middle of cord thread
Usable Thread	2.5mm thick or less Various thread available	2 mm thick or more Cord thread only
RPM	800~1,000rpm	750 rpm for ordinary use

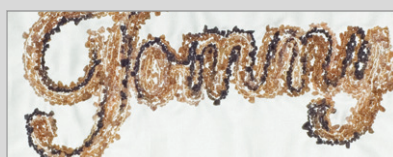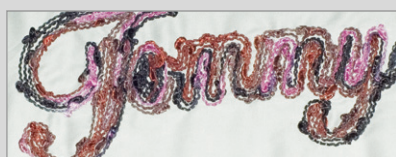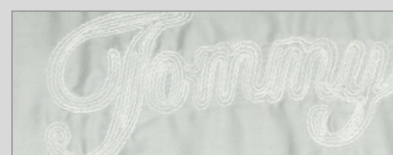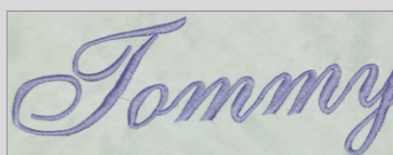

Various kinds of thread can be used for your own designs.